


MX4RW PoE | tunable WHITE

4" Continuous – Recessed Shallow Wall or Hard Surface



CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Create scalable, highly functioning smart buildings with Platformatics Power over Ethernet controls
- Tunable white from 3000K to 5000K CCT, minimum 80 CRI
- Create elegant spaces with a seamless, continuous row of illumination
- Designed for 3-1/2" shallow drywall or hard surface frames
- Flat and regressed lenses give designers a variety of looks
- Maximize energy savings with efficacies as high as 136 lm/W
- Versatile MX4 system includes recessed, surface, suspended and in-wall mounting, see hew.com
- Diffuse acrylic lens provides uniform illumination for visual comfort
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING – Extruded aluminum.
- SHIELDING – Extruded, flat, diffuse acrylic lens.
- FINISH – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High quality mid-power LED board. L70 > 60,000 hours per IES TM-21. Low-voltage DC fixture, to be fed by Class 2 power supply. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- MOUNTING – Drywall mount allowing for materials 1/4" - 2" thick. Fixture to be installed prior to drywall or finished hard surface material.
- LISTINGS – cCSAus certified as luminaire suitable for dry or damp locations.
- WARRANTY – 5-year limited warranty, see hew.com/warranty.

SYSTEM REQUIREMENTS

- PoE-ready luminaires are connected to building power systems through network integration and require other components for complete PoE lighting system
- For additional PoE info, see hew.com/poe
- Consult factory for design support



ORDERING EXAMPLE: MX4RWTR - 8'00 - P7/835 - F - OPTIONS - POE PR

SERIES	FIXTURE STYLE	LENGTH	LUMENS ^[1]	CRI	CCT
MX4RW	TR Drywall or Hard Surface - Trim	Lengths specified in feet and inches using 4" increments, 2' minimum. Example: 8'00 = 8'-0"	P7 700lm	8 80	27 2700K
	TL Drywall or Hard Surface - Trimless		9 90 ^[2]	30 3000K	
					35 3500K
					40 4000K
					50 5000K
					TW Tunable white (80 CRI, 3000K-5000K)

PRODUCT BUILDER
Simplify ordering & layout design with the Williams Linear Product Builder at hew.com/product-builder

SHIELDING

- F Flat, diffuse acrylic
- R Regressed diffuse acrylic^[5]

OPTIONS^[3]

- V90 Vertical 90° corner, suspended^[6]
- V90R Vertical 90° corner, recessed^[7]
- V90G Vertical 90° corner, grid^[8]

CONTROL^[4]

- POE PR Power over Ethernet, Platformatics-ready

NOTES

- ¹ Lumens per foot output based on F shielding and 3500K for single CCT and 4000K for TW. Actual lumens may vary ±5%. See page 2 for FIXTURE PERFORMANCE DATA.
- ² Extended lead times may apply. Consult factory for availability. Not available with Tunable White.
- ³ See page 3 for FINISH OPTIONS. Custom colors available upon request.
- ⁴ See page 2 for NODE CONNECTION DETAILS. For additional PoE info, see hew.com/poe.
- ⁵ See page 2 for SHIELDING DETAILS. Not available with transition options.
- ⁶ Connects MX4D to vertically mounted MX4RW. See page 3 for FIXTURE DETAILS. Ships separately.
- ⁷ Transitions MX4RT to vertically mounted MX4RW. See page 3 for FIXTURE DETAILS. Ships separately.
- ⁸ Connects MX4RG to vertically mounted MX4RW. See page 3 for FIXTURE DETAILS. Ships separately.



MX4RW PoE | tunable WHITE

4" Continuous – Recessed Shallow Wall or Hard Surface

FIXTURE PERFORMANCE DATA

STANDARD (PER FOOT)

DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
749	6	128

TUNABLE WHITE (PER FOOT)


DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
745	5	136

MULTIPLIER TABLES

COLOR TEMPERATURE			
CCT	LUMENS		
	STANDARD	TUNABLE WHITE	
80 CRI	2700K	0.97	—
	3000K	0.99	0.95
	3500K	1.00	0.98
	4000K	1.03	1.00
	5000K	1.06	0.96


90 CRI	2700K	0.82	—
	3000K	0.83	—
	3500K	0.84	—
	4000K	0.86	—
	5000K	0.90	—

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Standard results based on 3500K standard, 80 CRI, actual lumens may vary ±5%.
- Tunable white results based on 4000K standard, 80 CRI, actual lumens may vary ±5%.
- Use multiplier tables to calculate additional options.



PHOTOMETRY

MX4RWTR-4'00-P7/835-F Total Luminaire Output: 2996 lumens; 23.4 Watts | Efficacy: 128 lm/W | 80 CRI; 3500K CCT




CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	1227	1227	1227	
5	1233	1211	1209	115	
15	1176	1147	1140	325	
25	1051	1034	1019	476	
35	902	875	859	551	
45	724	708	679	544	
55	544	511	502	463	
65	338	326	316	324	
75	154	153	154	164	
85	24	24	24	36	
90	2	0	0		

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	916	31
	0 - 40	1467	49
	0 - 60	2473	83
	0 - 90	2996	100
	0 - 180	2996	100


NODE CONNECTION DETAILS

Includes 24" cable with 4-position mating connector for Platformatics POE-LN2 node. See node spec sheet for details: platformatics.com/product/poe-ln2

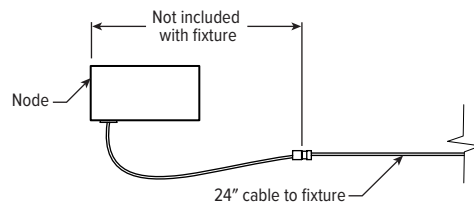


SHIELDING DETAILS

FLAT



REGRESSED




MX4RW PoE | tunable WHITE


4" Continuous – Recessed Shallow Wall or Hard Surface

FIXTURE DETAILS

BACK VIEW




END VIEW

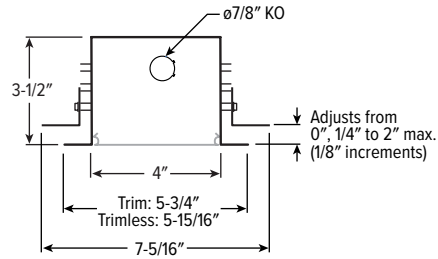


TRANSITION CORNERS

Includes tamper resistant lens bracket for lower end of vertical fixture.

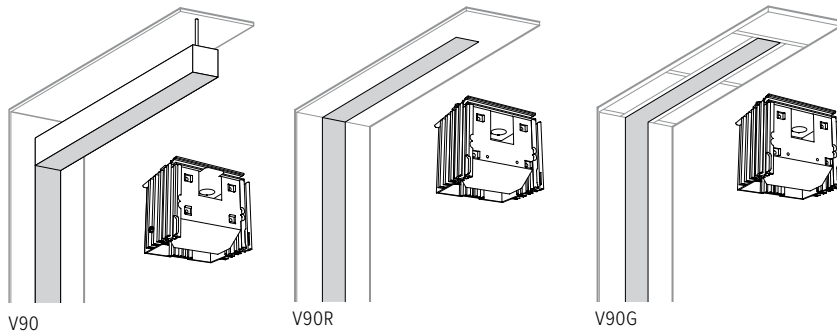


TRIM FINISH DETAILS

Trimless




Trim

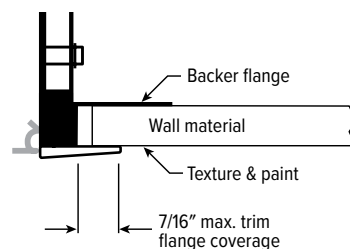

ROUGH-IN DIMENSIONS

- Framing allowance for width is 5-3/4" \pm 1/4".
- Framing allowance for length is total length plus 1-1/2" minimum.

FINISH OPTIONS

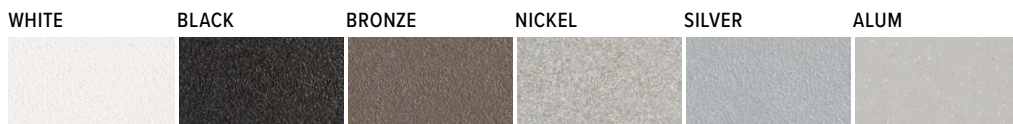

For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.

