

PXG shown

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Create scalable, highly functioning smart buildings with Platformatics Power over Ethernet controls
- Tunable white from 3000K to 5000K CCT, minimum 80 CRI
- Dramatically illuminate accent walls and emphasize textured surfaces
- Sleek, linear design incorporates clean lines, slim styling, and a continuous row of light
- Quick and easy installation with wall mounted bracket providing multiple pre-drilled screw locations and a quick hang feature for the fixture
- Solutions for both grid and drywall ceilings
- Adjustable extensions allow for a perfect fit to meet adjacent walls
- Diffuse acrylic lens shields LEDs from view
- Made Right Here® in the USA

ORDERING EXAMPLE: PX G - 46 - 14'08 - P9/835 - G - LCAP/RCAP - OPTIONS - POE PR

ORDERING INFO

SERIES	CEILING TYPE	WIDTH	HEIGHT	LENGTH
PX	G Grid F Drywall	4 4"	6 6"	Lengths specified in feet and inches using 1" increments, 2' minimum. Example: 14'08 = 14'-8"

PRODUCT BUILDER

Simplify ordering & layout design with the Williams Linear Product Builder at hew.com/product-builder

LUMEN PACKAGE ^[1]	CRI	CCT	DISTRIBUTION	LEFT END TYPE	RIGHT END TYPE
P5 500lm	8 80	27 2700K	G Graze	LWALL Wall	RWALL Wall
P9 900lm	9 90 ^[2]	30 3000K 35 3500K 40 4000K TW Tunable white (80 CRI, 3000K–5000K)		LCAP Cap	RCAP Cap

SPECIFICATIONS

- HOUSING – Formed sheet metal and aluminum.
- FINISH – Textured matte white polyester TGIC powder coat bonded to phosphate-free, multistage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High quality mid-power LED board. L70 > 50,000 hours per IES TM-21. Low-voltage DC fixture, to be fed by Class 2 power supply. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- MOUNTING – Wall mount rail, predrilled with wall screw locations, with quick hang feature.
- LABELS – cETLus conforms to UL STD 1598. Certified to CAN/CSA STD C22.2 No. 250.0. Suitable for damp locations.
- WARRANTY – 5-year limited warranty, see hew.com/warranty.

OPTIONS

DG Diffuse graze acrylic lens

CONTROL ^[3]

POE PR Power over Ethernet, Platformatics-ready

SYSTEM REQUIREMENTS

- PoE-ready luminaires are connected to building power systems through network integration and require other components for complete PoE lighting system
- For additional PoE info, see hew.com/poe
- Consult factory for design support



NOTES

- ¹ Lumens per foot based on 80 CRI, 3500K for single CCT and 4000K for TW. Actual lumens per foot may vary +/-5%. See page 2 for FIXTURE PERFORMANCE DATA.
- ² Extended lead times may apply. Consult factory for availability. Not available with Tunable White

³ See page 2 for NODE CONNECTION DETAILS. For additional PoE info, see hew.com/poe.



FIXTURE PERFORMANCE DATA

STANDARD

	DELIVERED LUMENS	WATTAGE PER FOOT	EFFICACY (lm/W)
P5	500	5.2	96.2
P9	932	10.4	89.6


TUNABLE WHITE

	DELIVERED LUMENS	WATTAGE PER FOOT	EFFICACY (lm/W)
P5	467	5.2	89.8
P9	851	10.4	81.8

MULTIPLIER TABLE


		COLOR TEMPERATURE	
		LUMENS	
	CCT	STANDARD	TUNABLE WHITE
80 CRI	2700K	0.97	–
	3000K	0.99	0.95
	3500K	1.00	0.98
	4000K	1.03	1.00
	5000K	1.06	0.96
90 CRI	2700K	0.80	–
	3000K	0.82	–
	3500K	0.83	–
	4000K	0.86	–

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Standard results based on 3500K standard, 80 CRI, actual lumens may vary ±5%.
- Tunable white results based on 4000K standard, 80 CRI, actual lumens may vary ±5%.
- Use multiplier table to calculate additional options.

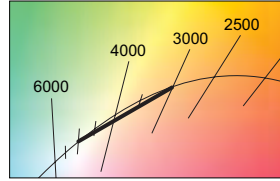

PHOTOMETRY

PXF-46-03'08-P9/835-G-LCAP/RCAP Total Luminaire Output: 3303 lumens; 38.2 Watts | Efficacy: 86.5 lm/W | 80 CRI; 3500K CCT

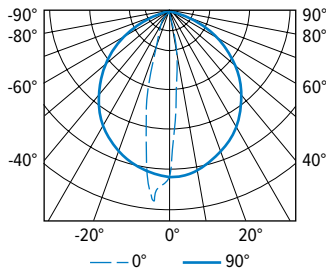


	VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
		0°	45°	90°	135°	180°	
CANDLEPOWER DISTRIBUTION	0	4163	4163	4163	4163	4163	
	5	2100	2794	4151	4976	4786	343
	15	467	852	3931	3375	2135	668
	25	259	284	3570	1377	567	636
	35	227	238	3070	523	337	558
	45	229	206	2463	330	180	450
	55	170	190	1741	157	113	341
	65	97	123	953	86	67	213
	75	38	52	258	38	27	82
	85	4	7	21	4	0	12
90	0	0	0	0	0		

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1646	50
	0 - 40	2204	67
	0 - 60	2996	91
	0 - 90	3303	100
	0 - 180	3303	100


NODE CONNECTION DETAILS

Includes 24" cable with 4-position mating connector for Platformatics POE-LN2 node. See node spec sheet for details: platformatics.com/product/poe-ln2

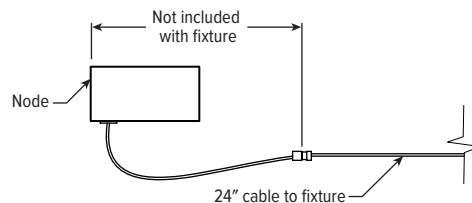

CEILING TYPE DETAILS

NEMA G

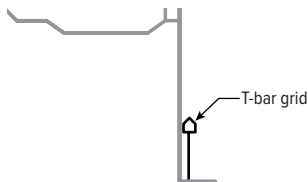

NEMA F

