

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs
- Sealed and gasketed weather proof housing and lamp heads
- Remote capable
- High-performance reflector and glass lens for optimal light distribution
- Fully automatic solid-state two rate charger recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

SPECIFICATIONS

- HOUSING** – Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate in gray or black finish. Sealed and gasketed housing with hinged cover. Sealed test switch.
- LAMP HEADS** – Chrome-plated metallized reflector and tempered glass.
- ELECTRICAL** – Dual 120/277 voltage. 9.6V long life, maintenance-free, rechargeable NiCd battery. Remote capacity of 3.7W standard in operating temperatures of 0°C – 50°C. 1.875 watt (15 LEDs x 0.125) per head.
- MOUNTING** – External mounting brackets for simplified wall mounting. Knockout for conduit applications.
- LISTINGS** –
 - UL 924 standard as an emergency light suitable for wet locations (-20°C - +50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY** – 5-year limited warranty.

ORDERING EXAMPLE: EMER/W - GRY - OPTIONS - D

ORDERING INFO

SERIES	HOUSING COLOR	OPTIONS	VOLTAGE
EMER/W	GRAY Gray BLK Black	PC2 Polycarbonate shield ^[1] WG Wireguard ^[2]	D 120V/277V

REMOTE HEADS: WETRHL - P - GRAY - OPTIONS - MV ^[3]

SERIES	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
WETRHL	Wet location single remote head, 8 LEDs	P Polycarbonate D Die-cast	BLK Black GRAY Gray	HL 1.5-watt remote head, 12 LEDs MV Multi-voltage ^[4]
WETDRHL	Wet location dual remote head, 8 LEDs			

NOTES


- ¹ Ships separately. See page 2 for OPTIONS DETAILS.
- ² Ships separately. See page 2 for OPTIONS DETAILS.
- ³ Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS.

⁴ For use with 3.6V, 6V, 9.6V, or 12V power source.


EMER/W^{LED} Emergency Light - Wet Location

MOUNTING DETAILS

BACKVIEW

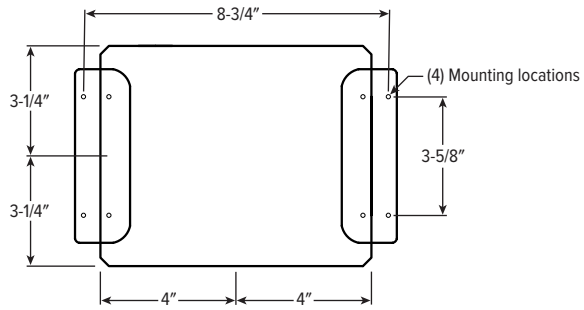

RIGHT SIDE VIEW

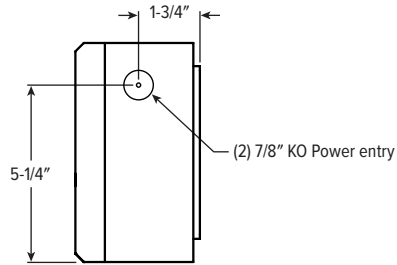

REMOTE HEAD DETAILS

WETRHL



DIMENSIONS: 4-1/2" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"

OPTIONS DETAILS

PC2



DIMENSIONS: 15" x 22" x 7-3/4"

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"