

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Support human-centric design with adaptive, individualized lighting using tunable white light
- Fully accessible without the use of tools
- Pull switch and grounded convenience outlet options available
- Optional anti-microbial white finish and pull cord available for use in healthcare applications
- Contoured architectural housing with die-cast aluminum end caps
- Keyhole mounting for easy installation
- Supplied with both Philips and tamper-resistant tri-groove screws for additional security
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING** – 20-gauge C.R.S. fixture channel. Front housing constructed of marine grade extruded aluminum with die-cast aluminum end caps.
- REFLECTIVE SURFACES** – 92% minimum average reflective white polyester powder coat on interior steel components.
- SHIELDING** – Frosted acrylic, .125" thick.
- FINISH** – Textured matte white polyester TGIC powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – High quality mid-power LED board. L70 > 50,000 hours per IES TM-21. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- MOUNTING** – Wall.
- LISTINGS** – cETLus conforms to UL STD 1598 and UL STD 8750. Certified to CAN/CSA STD C22.2 No. 250.0. Suitable for damp locations.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: WMAUD - 4 - L32U/L32D/8TW - AF - OPTIONS - DALI - UNV

ORDERING INFO

SERIES	LENGTH	LUMEN PACKAGE (EXAMPLE: L32U/L32D/8TW)	SHIELDING
WMAUD	2 2'	Specify lumen packages: U for Uplight and D for Downlight	AF Frosted acrylic, .125" thick
	3 3'	LUMENS ^[1] U OR D CRI CCT	
	4 4'	2' U Uplight 8 80 TW Tunable white (3000K–5000K)	
	3' D Downlight 9 90 ^[2] TW2 Tunable white (2700K-6500K)		
	4'	L20 2,000lm	
		L23 2,300lm	
		L32 3,200lm	

OPTIONS ^[3]

EM/10W	10-watt emergency battery ^[5]
PSBR/120	Single-circuit bottom-mounted pull switch on right ^[6]
PSBL/120	Single-circuit bottom-mounted pull switch on left ^[7]
PS2BR/120	Two-circuit, 4-position bottom-mounted pull switch on right ^[8]
PS2BL/120	Two-circuit, 4-position bottom-mounted pull switch on left ^[9]
APCW	Anti-microbial white pull cord ^[10]
GCOL	Grounded convenience outlet on left ^[11]
GCOR	Grounded convenience outlet on right ^[12]
AMW	Anti-microbial white finish
OCC___	Factory-installed occupancy sensor ^[13]
	OCCWS FS-505-PP-___ Low voltage ultrasonic sensor

CONTROL ^[4]

DALI	Driver prewired for DALI applications
DIM	(1) 0-10V signal to control dimming (1) 0-10V signal to control CCT
DMX	Driver prewired for DMX applications
PSQ	Lutron T-Series 2-channel tunable white 1%.

VOLTAGE

120	120V
277	277V
UNV	120-277V

ACCESSORIES

TPTG TOOL	Tamper-resistant tool for tri-groove screws. ^[14]
------------------	--

NOTES

- Lumen output based on 4000 CCT. Actual lumens may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA.
- Extended lead times may apply. Consult factory for availability.
- See page 3 for LOW-VOLTAGE CONTROLLER.
- See page 3 for FINISH OPTIONS.
- See page 3 for CONTROL DETAILS.
- 4' only.
- Operates downlight, 120V only.
- Operates downlight, 120V only.
- 120V only.
- 120V only.
- Packaged with fixture, field installed. Requires PSB_ or PS2B_ option.
- 120V only.
- 120V only.
- 120V or 277V only, must specify voltage. LVC and OCC options cannot be used simultaneously on 2' and 3' units.
- Tamper-resistant tool must be ordered separately for use with tamper-resistant screws. Please specify quantity required per project. See page 2 for FIXTURE DETAILS.



FIXTURE PERFORMANCE DATA


	LED PACKAGE	DELIVERED LUMENS			TOTAL WATTAGE	EFFICACY (lm/W)
		UP	DOWN	TOTAL		
2'	L20U/L20D	2011	2011	4022	34.7	115.9
3'	L23U/L23D	2361	2361	4722	38.5	122.6
4'	L32U/L32D	3256	3256	6512	54.7	119.0

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 4000K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.


MULTIPLIER TABLE

	COLOR TEMPERATURE				
	CCT	TW		TW2	
		LUMENS	WATTAGE	LUMENS	WATTAGE
80 CRI	2700K	-	-	0.93	1.02
	3000K	0.95	1.04	0.95	1.01
	3500K	0.98	1.02	0.98	1.00
	4000K	1.00	1.00	1.00	1.00
	5000K	0.96	1.04	1.02	1.00
6500K	-	-	1.01	1.04	
90 CRI	2700K	-	-	0.93	1.02
	3000K	0.91	1.03	0.95	1.01
	3500K	0.96	1.01	0.98	1.00
	4000K	1.00	1.00	1.00	1.00
	5000K	1.03	1.03	1.03	1.00
	6500K	-	-	1.02	1.04

TW




TW2



PHOTOMETRY

WMAUD-4-L32U/L32D/8TW-AF Total Luminaire Output: 6512 lumens; 54.7 Watts | Efficacy: 119.0 lm/W | 84.2 CRI; 4025K CCT

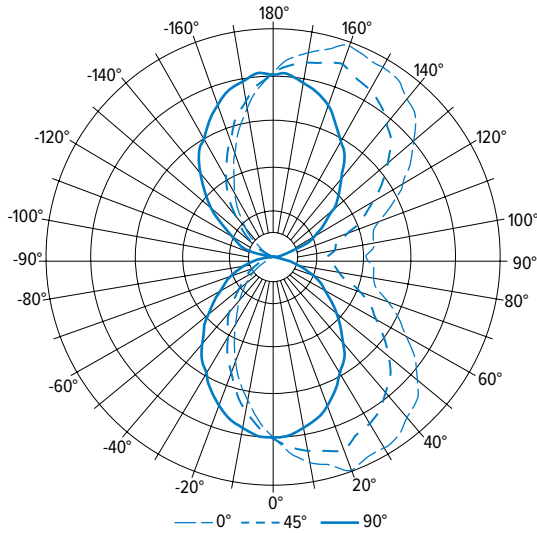


VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	1166	1166	1166	1166	1166	
5	1273	1233	1159	1105	1070	110
15	1384	1289	1083	913	838	310
25	1427	1273	952	697	598	454
35	1410	1210	806	510	405	532
45	1313	1077	619	320	228	535
55	1105	869	443	176	101	470
65	890	675	290	67	18	368
75	681	452	145	5	9	260
85	656	394	33	17	33	214
90	598	361	0	31	46	
95	652	397	35	24	39	216
105	677	458	147	5	9	261
115	884	679	291	64	16	367
125	1096	875	451	179	101	470
135	1296	1077	625	320	228	535
145	1398	1210	820	513	408	533
155	1416	1271	964	700	601	455
165	1380	1290	1099	915	842	311
175	1271	1235	1179	1111	1077	111
180	1169	1169	1169	1169	1169	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	875	13
0 - 40	1407	22	
0 - 60	2412	37	
0 - 90	3254	50	
90 - 120	844	13	
90 - 150	2382	37	
90 - 180	3259	50	
0 - 180	6512	100	

FIXTURE DETAILS

BACKVIEW

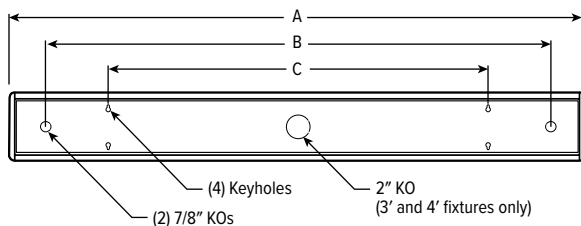

	DIMENSIONS		
	A	B	C
2'	25-1/8" O.C.	20-1/2" O.C.	16" O.C.
3'	37-1/8" O.C.	32-1/2" O.C.	32" O.C.
4'	49-1/8" O.C.	42-1/2" O.C.	32" O.C.

OCCUPANCY SENSOR



LOW-VOLTAGE CONTROLLER

120V or 277V only. Color tuning performed by alternate 0-10V control source.
LVC wall plate accessories available, see hew.com for details.

EXAMPLE: LVC2U/D			
CONTROLLER	FUNCTION		
	LOAD 1		LOAD 2
LVC1 1-circuit	U D	Up Down	
LVC2 2-circuit	U/ D	Up	D Down
LVC3 Dimming control	DIMU	0-10V dimming for Uplight	/D Down /DIMD 0-10V dimming for Downlight
	DIMD	0-10V dimming for Downlight	/U Up /DIMU 0-10V dimming for Uplight
	SEQU	Up and down sequentially switched	

CONTROL DETAILS


DIM



DALI




DMX



LUTRON T-SERIES



FINISH OPTIONS

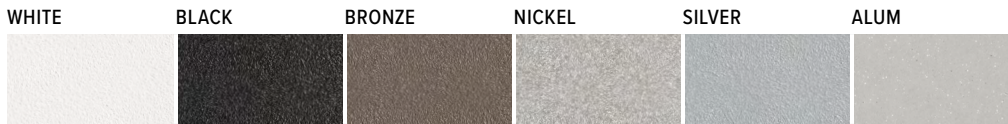

For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.

