

CMH & CW SERIES

INSTALLATION INSTRUCTIONS



WARNING:

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.
- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.
- Suitable for dry and damp locations.

CONTENTS

STEP 1 PREPARATION	1
STEP 2 MOUNTING	2



STEP 3 WIRING	3
STEP 4 FINISHING	4

TOOLS REQUIRED

- Philips screwdriver, by others
- Fixture mounting hardware, by others

STEP 1 PREPARATION

A. Remove fixture housing cover

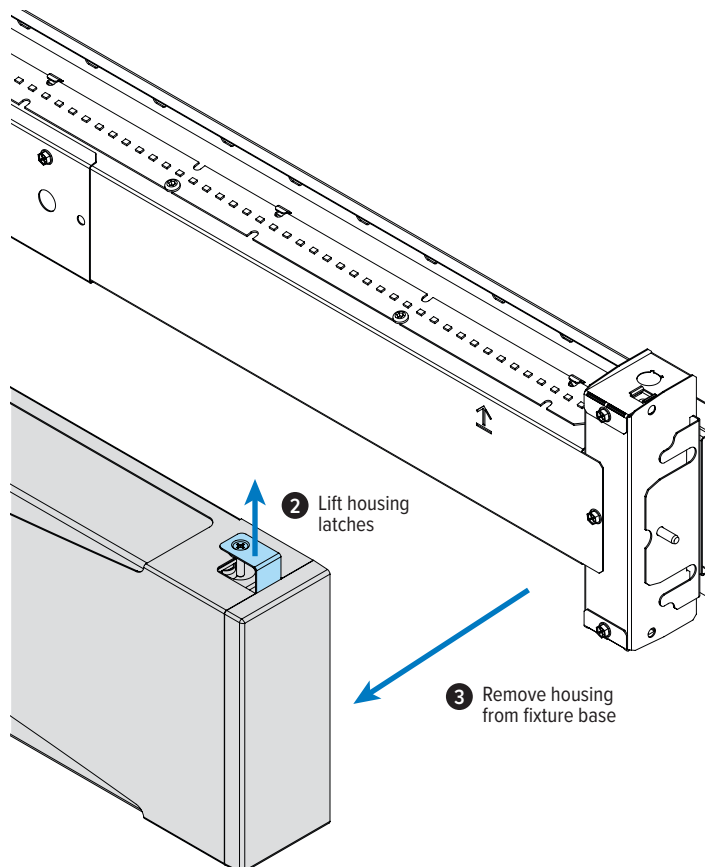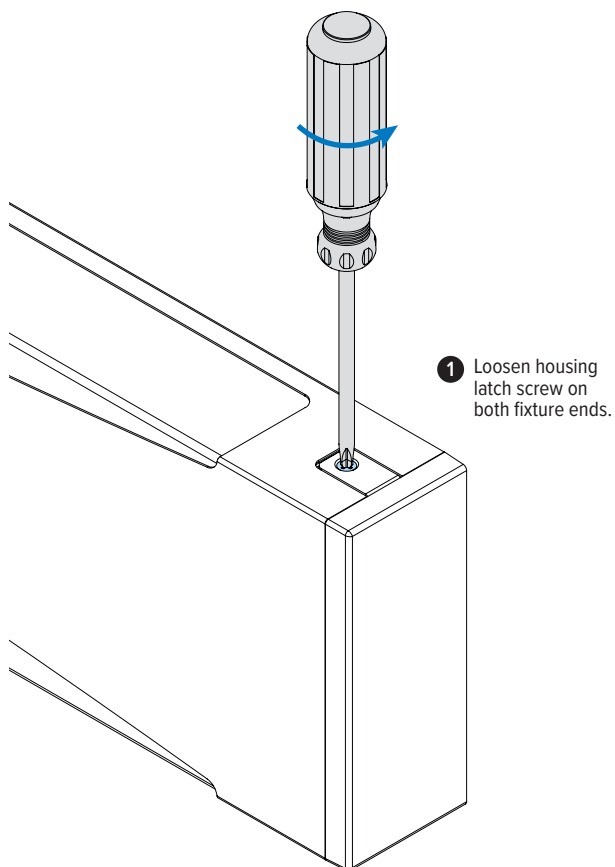


CMH & CW SERIES

INSTALLATION INSTRUCTIONS

STEP 2 MOUNTING

A. Install the fixture base to the wall

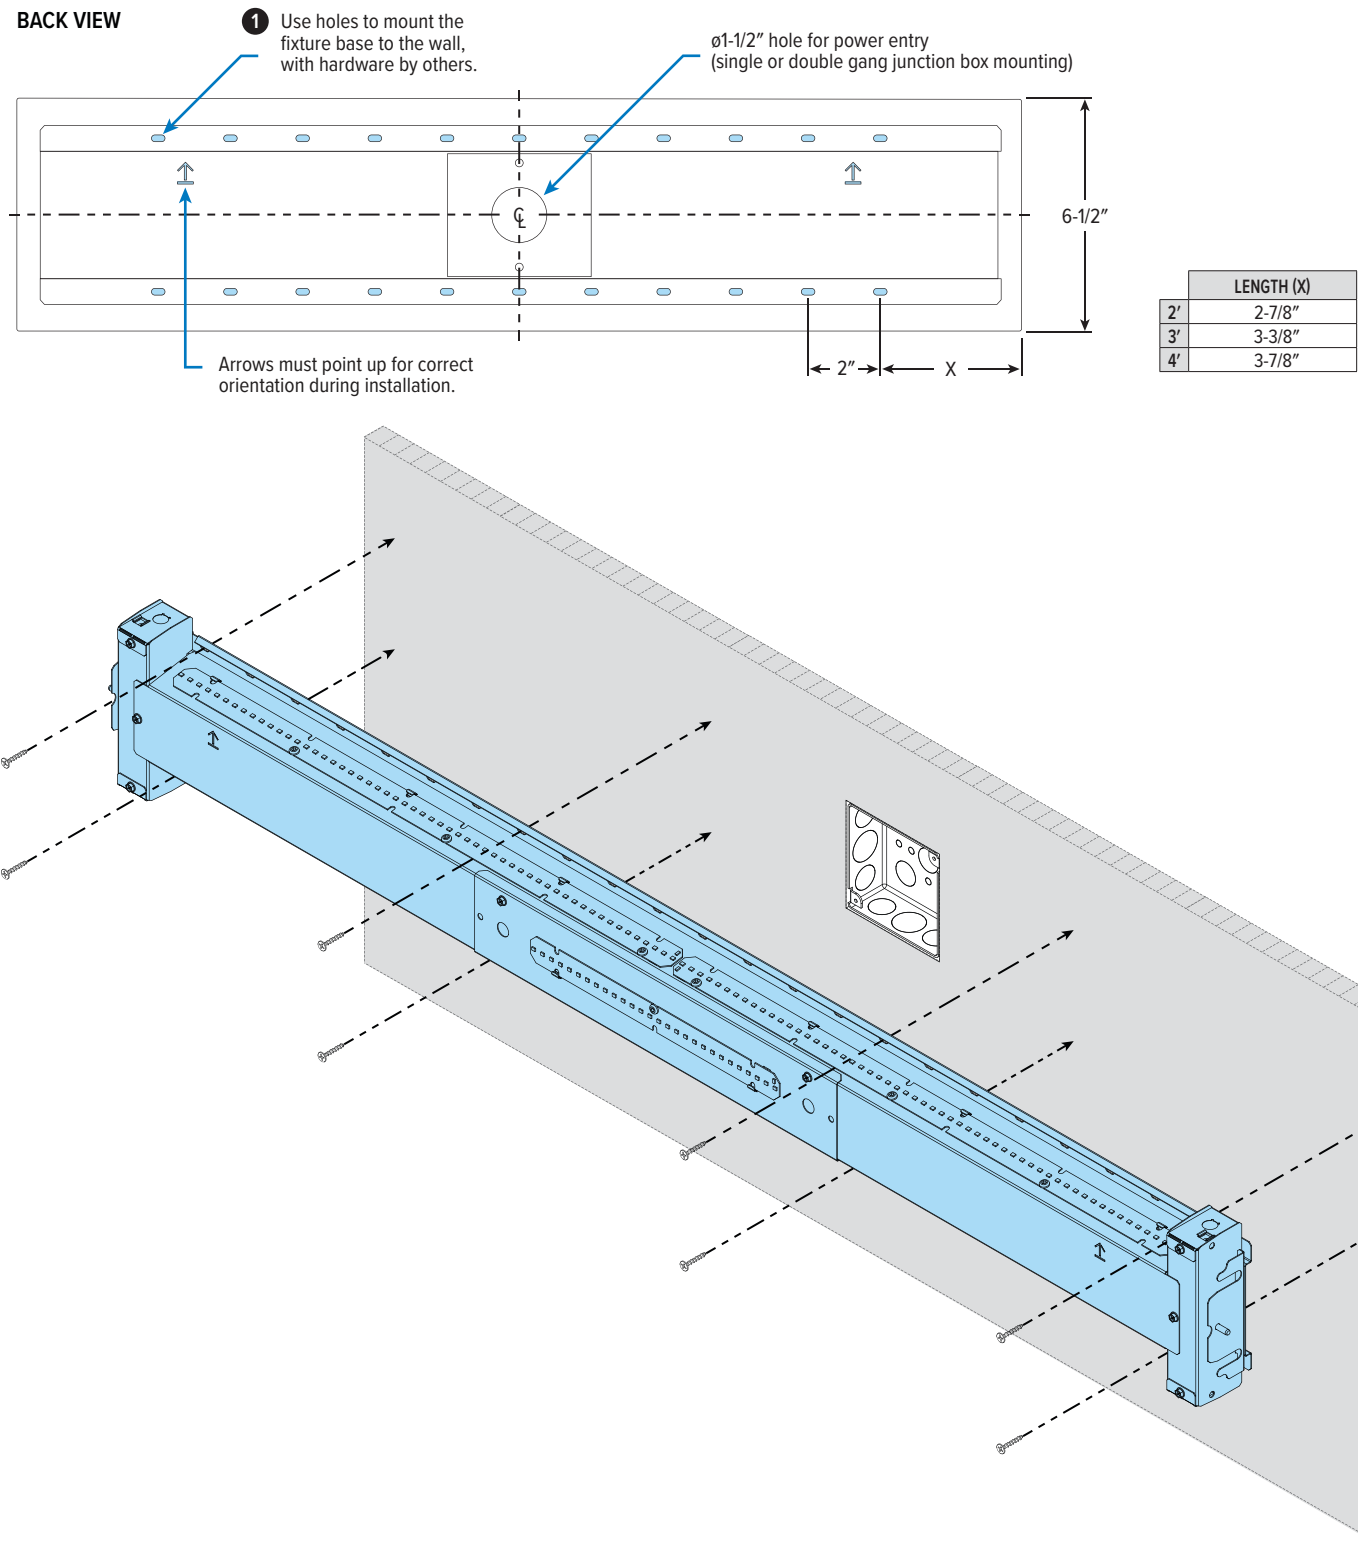


CMH & CW SERIES


INSTALLATION INSTRUCTIONS

STEP 3 WIRING


A. Make electrical connections in accordance with NEC and local codes.

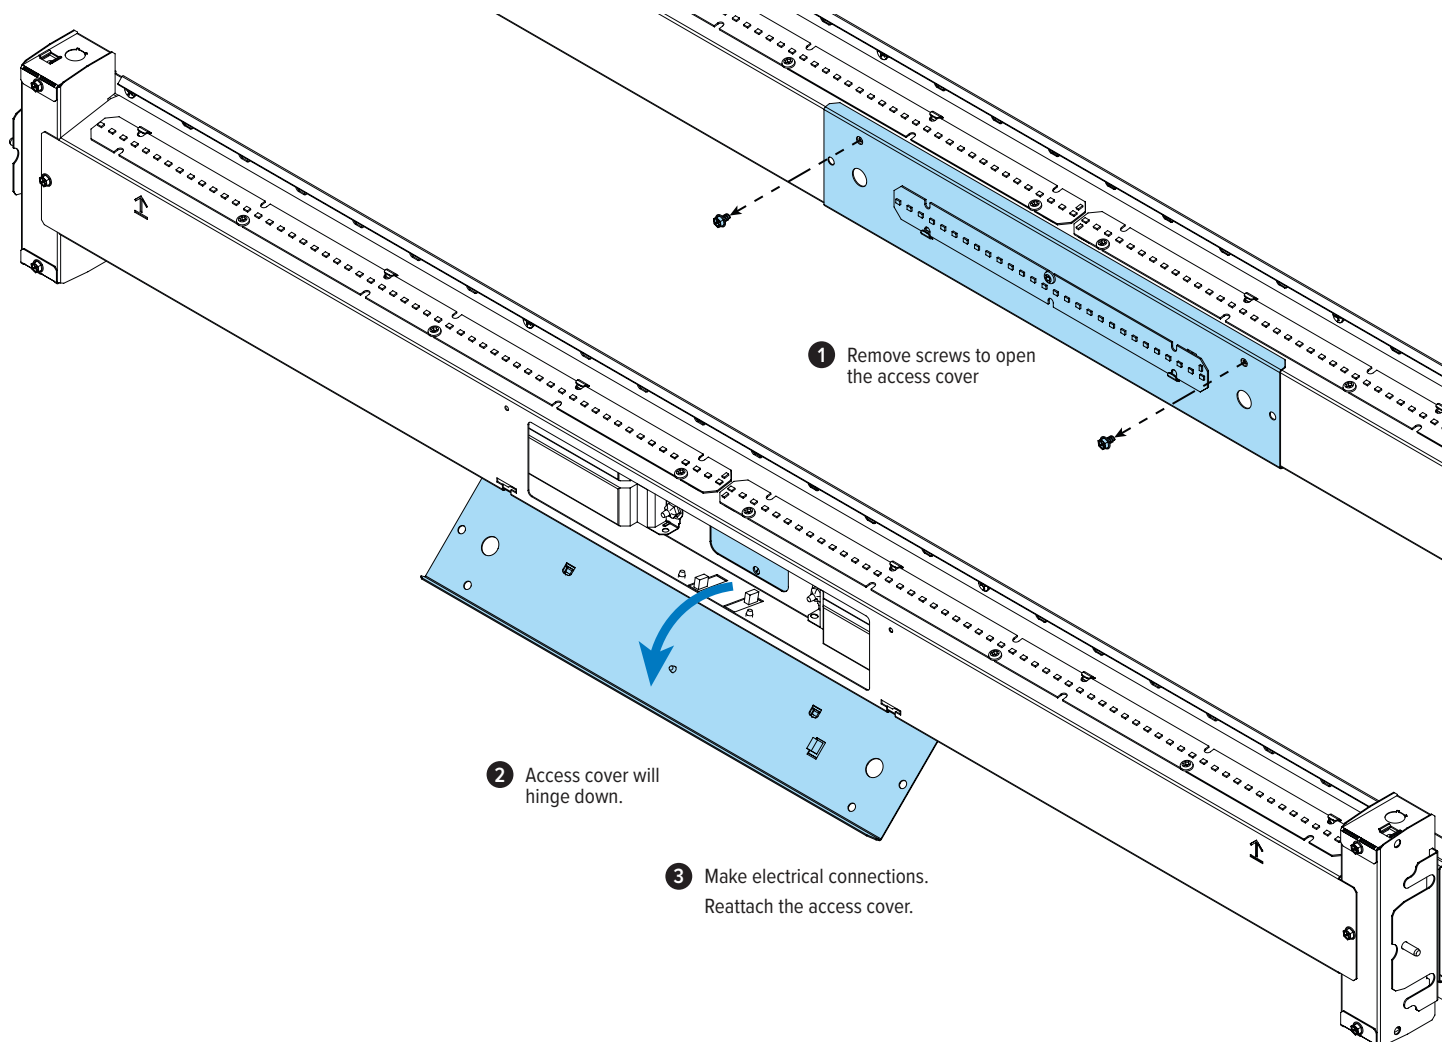

Driver/power supply disconnects accept #12 – #16 AWG stranded or solid wire. Attach power supply and ground wires using UL listed wire connectors. Consult factory for other configurations.

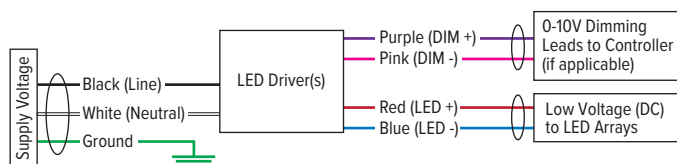

Typical electrical connections with emergency battery pack.

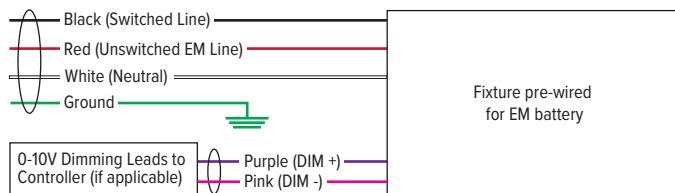

CMH & CW SERIES

INSTALLATION INSTRUCTIONS

STEP 4 FINISHING

A. Reinstall fixture housing cover

