
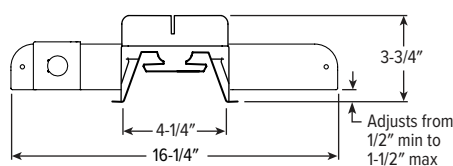


M4PS[®] tunable WHITE

4.5" MRI Shallow Plenum Downlight – Square

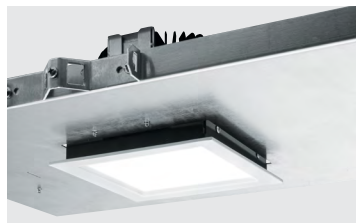

CATALOG #: _____

TYPE: _____

PROJECT: _____

ORDERING EXAMPLE: **M4PS - L20/8TW - OPTIONS - LW - OF - WH - TRIM OPTIONS - N - F1M**

HOUSING TRIM MOUNT



HOUSING

SERIES	LUMENS ^[1]	COLOR	OPTIONS
M4PS	L11 1,100lm L20 2,000lm	8TW Tunable white (80 CRI, 2700K-5000K)	ATH Airtight construction CP Chicago plenum (CCEA) ^[2]

TRIM^[3]

TRIM TYPE	DISTRIBUTION ^[4]	FLANGE TYPE	REFLECTOR FINISH	TRIM OPTIONS
L Flush lens	W 75° Wide M 35° Medium N 30° Narrow	OF 1/2" standard flange SF 1/4" mud-in flange ^[5]	CS Clear semi-specular powder coat WH White texture powder coat BL Black texture powder coat	IP IP65 rated trim AD Diffuse acrylic lens ^[6] PD Diffuse 1/8" polycarbonate lens ^[7] WET/CC Wet location, covered ceiling listed ^[8] AM Anti-microbial ^[9]

MOUNTING

MOUNTING TYPE ^[10]	MOUNTING HARDWARE ^[11]
N Open pan for new construction	F1M Factory-installed 2-position fixed pan bracket, universal bar hanger included ^[12]
I IC-rated enclosure for new construction	BA1M Adjustable butterfly pan bracket, aluminum, bar hanger not included ^[13] CA1M Adjustable caterpillar pan bracket, aluminum, universal bar hanger included ^[14]

REMOTE DRIVER ENCLOSURE (ORDERED SEPARATELY)^[15]

ORDERING EXAMPLE: **M4PS - RDBTW1 - L20 - OPTIONS - DIM - UNV**

SERIES	DRIVER BOX	DRIVER QTY.	LUMENS	OPTIONS	CONTROL ^[16]	VOLTAGE
M4PS	RDBTW Remote driver enclosure	1 7 2 8 3 9 4 10 5 11 6 12	L11 1,100lm L20 2,000lm	EM/10W 10-watt emergency battery ^[17] F Fuse kit	DALI Driver prewired for DALI applications DIM Dimming driver with (1) 0-10V signal to control dimming and (1) 0-10V signal to control CCT DMX Driver prewired for DMX applications PSQ Lutron T-Series 2-channel tunable white 1%. ^[18]	UNV 120-277V

NOTES

- ¹ Lumen output based on W distribution and WH finish, 4000K/80CRI. Actual lumens may vary +/-5%. See page 2 for FIXTURE PERFORMANCE DATA.
- ² I Mounting Type required.
- ³ Trim ships separately.
- ⁴ Beam angle based on WH reflector finish.
- ⁵ For use with mud-in plaster construction only, supplied with mud flange installation kit. See page 3 for FLANGE TYPE DETAILS. Not available with ATH or IP options.
- ⁶ Wide distribution only.
- ⁷ Wide distribution only.
- ⁸ Not available with PD trim option.
- ⁹ WH and BL Reflector Finishes only.

- ¹⁰ Mounting hardware required, ordered separately, see MOUNTING HARDWARE ordering info. See page 3 for MOUNTING TYPE DETAILS.
- ¹¹ See page 4 for MOUNTING HARDWARE DETAILS.
- ¹² Universal bar hanger ships uninstalled
- ¹³ N Mounting Type only.
- ¹⁴ N Mounting Type only.
- ¹⁵ Required. Ordered as a separate catalog number, ships separately. See page 4 for REMOTE DRIVER ENCLOSURE DETAILS (ORDERED & SHIPPED SEPARATELY).
- ¹⁶ All drivers dimmed by single control signal.
- ¹⁷ Available with RDB1 only. Specify CEC in the option code when California Energy Commission regulations are required.
- ¹⁸ Not available with I Mounting Type.



M4PS^{tunable WHITE} 4.5" MRI Shallow Plenum Downlight – Square

FEATURES

- Support human-centric design with adaptive, individualized lighting using tunable white light
- Designed with non-ferrous materials for MRI imaging suites
- IP65-rated die-cast trim includes easy-to-clean flush lens
- Slim 5" depth for minimal plenum space applications
- Beam angles ranging from 30° narrow to 75° wide for tailored performance
- 4 inch aperture is unobtrusive in small scale spaces
- Square shape accentuates architectural styles
- Spring clip retention system eliminates trim sag
- Contemporary design provides glare-free illumination for a soft ceiling appearance
- Fully room-side accessible

SPECIFICATIONS

- HOUSING** – Spun housing with forged aluminum heat sink. Aluminum splice compartment. Trim housing adjusts for ceiling thickness from 1/2" - 1-1/2".
- LENSED TRIM** – Die-cast aluminum frame with micro-prismatic, acrylic lens.
- ELECTRICAL** – High-performance Class 2 LED array. Modular quick-connect plug for easy field-connection of LED light assembly to splice compartment. Reported L70>50,000 hours. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses. Remote mounted driver box must be located outside MRI room, RF filter required, provided by others.
- MOUNTING** – Recessed. Aluminum mounting pan for new construction or IC-rated enclosure. Remote mounted driver enclosure required, ordered separately, must be located outside MRI room.

LISTINGS –

- cCSAus conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0 for damp locations. LED light assembly conforms to UL 2108 for remote installation.
- Suitable for wet location under covered ceiling when specified with WET/CC option.
- IC-rated for direct contact with insulation when specified with I Mounting Type.
- City of Chicago Environmental Air approved when specified with CP option.
- Complies with ASTM-E283 when specified with ATH option.
- RoHS compliant.
- Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

FIXTURE PERFORMANCE DATA


	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
L11	W	1156	14.6	79
	M	1197	14.6	82
	N	1158	14.6	79
L20	W	2016	24.0	84
	M	2087	24.0	87
	N	2019	24.0	84

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is based on 120V input.
- Results based on 4000K, 80 CRI, actual lumens may vary +/-5%
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier tables to calculate additional options.

MULTIPLIER TABLES


COLOR TEMPERATURE		
CCT	LUMENS	WATTS
2700K	0.83	1.03
3000K	1.00	1.00
3500K	0.99	0.99
4000K	1.00	1.00
5000K	0.98	1.03

TRIM	
CATALOG NUMBER	CONVERSION FACTOR
AD	0.85
PD	0.85



PHOTOMETRY


M4PS-L20/8TW-DIM-UNV-LW-OF-WH Total Luminaire Output: 2016 lumens; 24.0 Watts | Efficacy: 84.0 lm/W | 80.0 CRI; 4000K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	1134	1134	1134	
5	1134	1128	1128	107
15	1093	1088	1084	307
25	1022	1025	1011	466
35	726	864	706	485
45	327	504	315	315
55	187	210	180	179
65	102	100	99	102
75	43	43	43	47
85	6	6	5	9
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	880	44
	0 - 40	1365	68
	0 - 60	1858	92
	0 - 90	2016	100
	0 - 180	2016	100

M4PS-L20/8TW-DIM-UNV-LM-OF-WH Total Luminaire Output: 2087 lumens; 24.0 Watts | Efficacy: 87.0 lm/W | 80.0 CRI; 4000K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	4486	4486	4486	
5	4338	4326	4340	397
15	2970	2970	2949	802
25	1027	1023	1024	503
35	300	302	318	205
45	111	120	117	93
55	49	54	51	48
65	24	26	26	25
75	10	10	12	11
85	0	1	1	2
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1702	82
	0 - 40	1907	91
	0 - 60	2049	98
	0 - 90	2087	100
	0 - 180	2087	100



H.E. Williams, Inc.

Carthage, Missouri

www.hew.com

417-358-4065

Designed and Manufactured in the USA

Information contained herein is subject to change without notice.

REV.06/08/23.LA

Downlights


Page 2 of 4

M4PS

tunable WHITE

4.5" MRI Shallow Plenum Downlight – Square




M4PS-L20/8TW-DIM-UNV-LN-OF-WH Total Luminaire Output: 2019 lumens; 24.0 Watts | Efficacy: 84.1 lm/W | 80.0 CRI; 4051K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	5270	5270	5270	
5	4963	4920	4907	443
15	2782	2815	2767	775
25	858	934	912	441
35	238	256	270	173
45	102	108	112	86
55	58	63	61	55
65	28	33	31	31
75	11	13	13	13
85	0	1	1	2
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1659	82
	0 - 40	1831	91
	0 - 60	1973	98
	0 - 90	2019	100
	0 - 180	2019	100

FLANGE TYPE DETAILS

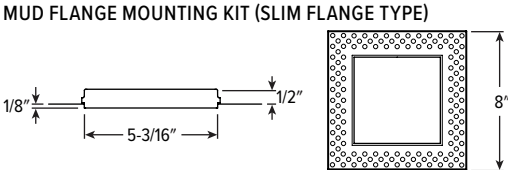


REFLECTOR FINISH DETAILS




MOUNTING TYPE DETAILS

NEW CONSTRUCTION

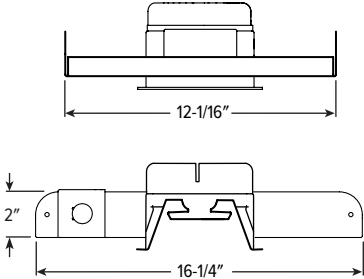

IC-RATED

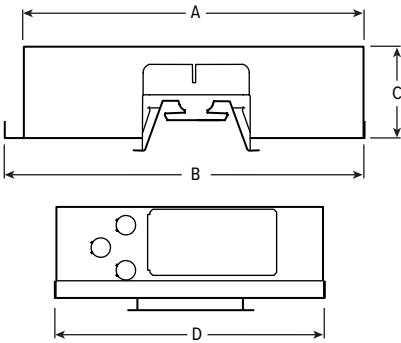


LUMENS	LENGTH			
	A	B	C	D
L11	15-3/16"	16"	4-1/8"	12-1/8"
L20	15-3/16"	16"	5-7/8"	12-1/8"


M4PS tunable WHITE 4.5" MRI Shallow Plenum Downlight – Square

MOUNTING HARDWARE DETAILS


F1M Factory-installed 2-position fixed pan bracket, universal bar hanger included

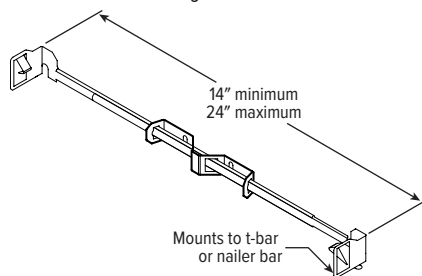

BA1M Adjustable butterfly pan bracket, aluminum, bar hanger not included (N Mounting Type only)




CA1M Adjustable caterpillar pan bracket, aluminum, universal bar hanger included (N Mounting Type only)

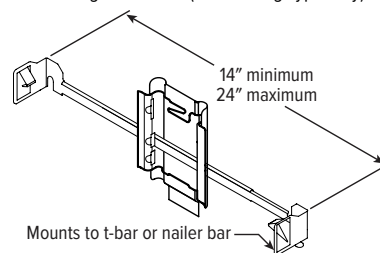


REMOTE DRIVER ENCLOSURE DETAILS (ORDERED & SHIPPED SEPARATELY)


REMOTE DRIVER ENCLOSURE FOR SINGLE FIXTURE



REMOTE DRIVER ENCLOSURE FOR SINGLE FIXTURE WITH EMERGENCY BATTERY

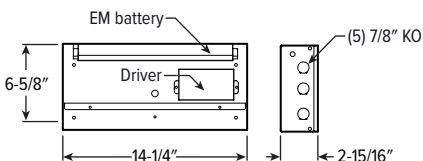

REMOTE DRIVER ENCLOSURE FOR 2 - 8 FIXTURES

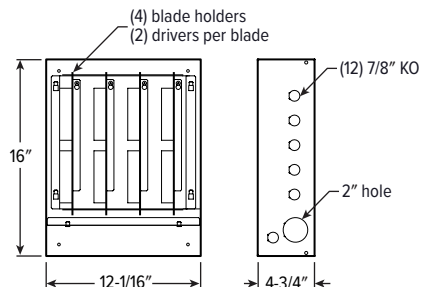

REMOTE DRIVER ENCLOSURE FOR 9 - 12 FIXTURES

